


SEAWATCH 7001C

2182 kHz Guard Receiver

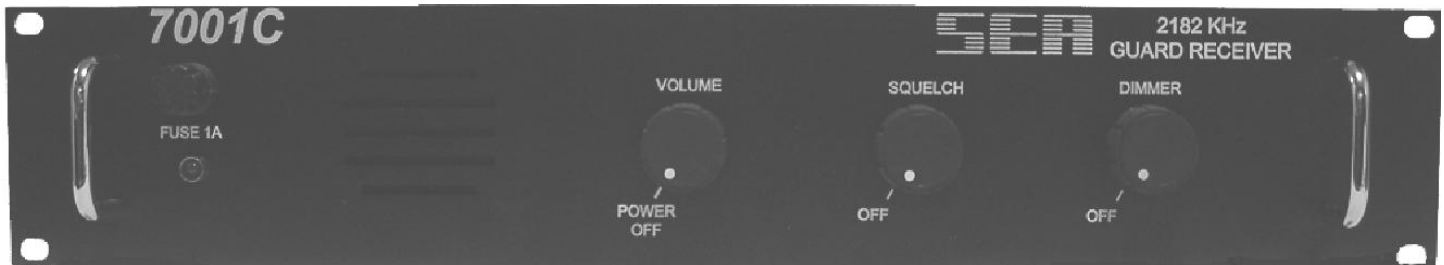

The SEA 7001C is a single channel crystal controlled SSB receiver designed for watch-keeping applications on the International Distress and Calling frequency of 2182.0 kHz. It features high sensitivity and a mechanical filter with steep skirts to assure reception of important distress and emergency traffic. A voice-activated squelch circuit can mute the receiver when no signal is present and can be adjusted or disabled from the front panel.

The 7001C is capable of local monitoring with its internal speaker and used in conjunction with the model 7001C-RS (remote), it can be monitored several miles away via a Telco circuit. All circuitry is conservatively designed for continuous 24 hour, 7 day-a-week operations. The unit is designed for rack mounting.

Since 1975, SEA has been designing and manufacturing leading edge marine communication equipment known throughout the industry for engineering excellence, reliability, and ease of operation. The SEA design philosophy has always been to exceed all applicable specifications for products that we manufacture.

SEA has a worldwide service network to support all of its products, which insures support and supply almost anywhere your ship is operating. There has never been a better time to buy American engineering and products backed by local service. For the name of the dealer nearest you, please call (425) 771-2182.



Specifications

General

Primary Voltage:..... 115 VAC, 60HZ
Current Drain:..... 1.0 Amp Max
Compliance:..... Complies with all applicable specs per FCC CFR 47, Part 80
Size:..... 3.5" (H) x 19" (W) x 8" (D) Panel Mount
Weight:..... 10.7 LBS
Operating Temperature: -20°C to +55°C
Panel Controls:..... Power/Volume, Squelch, Dimmer

Receiver

Operating Frequencies:..... 2182 KHz
Circuitry: Fully synthesized, double conversion
Mode of Reception:..... USB
RF Input:..... 50 ohms with VSWR less than 3:1
Sensitivity: Less than 0.7uV (-110dBm) for 12dB SINAD
AGC: Less than 10dB audio level change from 10uV to 100mV
SQL:..... Voice sensing with front panel control
Stability: ±10 Hz
Bandwidth:..... 400 - 2600Hz (-6dB)
Speaker Internal: 4 watts at less than 10% distortion into 4ohm int. speaker
Speaker External: via rear panel connections
Line Output 1: 600 ohm balanced, -10 dBm to +10 dBm, squelched
Line Output 2: 600 ohm balanced, -10 dBm to +10 dBm, un-squelched

SEA COM CORPORATION

7030 - 220th S.W., Mountlake Terrace, Washington 98043, 425.771.2182 Fax: 425.771.2650 www.seacomcorp.com